

# .100"(2.54mm) pitch Wire to Board Connectors






- \* Poles : 2x2~2x18
- \* Material : PBT UL94V-0 BLACK
- \* Suitable CT2543T series terminal

## Specifications

- \* Current rating: 3A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range: -25°C~+85°C
- \* Insulation resistance: 1,000MΩ min.
- \* Withstand voltage: 1,000AC/minute

P/N: CH2545F-2xXX

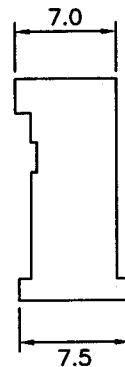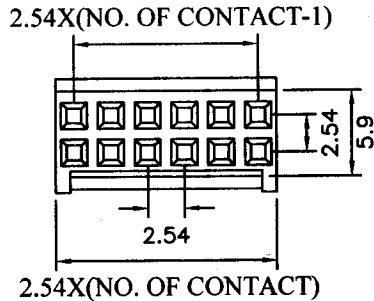

# .100"(2.54mm) pitch crimp terminal

## CT2543T Series

- \* Material: Phos bronze
- \* Finished: Tin-plated
- \* Used in CH2543, CH2543B CH2543C, CH2543E, CH2545, CH2545F series housings

- \* Wire range: AWG#24~#28
- \* Insulation O.D: 1.60mm(max)
- \* Thickness: 0.2mm
- \* Q'TY: 15,000pcs/reel

