

.079"(2.00mm)Pitch Flat Cable idc Socket

CI2000 SERIES

- * Insulator Material : P.B.T UL 94V-0 BLACK.
- * Contact Material : Phosphor bronze.
- * Contact Plated : gold flash over nickel.
- * Mates with CW2008 SERIES Header.

SPECIFICATIONS




- * Current rating : 1A AC, DC.
- * Temperature range : -40°C~+105°C.
- * Insulation resistance : 1000MΩ min.
- * Withstand voltage : 500V AC/minute.
- * Wire Size flat cable I.D.C : 1.00mm pitch
AWG#28(standard) or #30(Solid)

ORDERING CODE

CI2000 - XX B P Y 2 G
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① SERIES NO.
- ② NO.OF CIRCUIT : 06-64
- ③ COLOR : B=BLACK E=GREY
- ④ TERMINAL MATERIAL
P=PHOSPHOR BRONZE
- ⑤ RIB OPTION
Y=W/ Relief
N=W/ O Relief
2=W/O S.R.
- ⑦ CONTACT PLATING
G=SELECTIVE GOLD OVER NICKEL


P/N: CI2000-XX SERIES

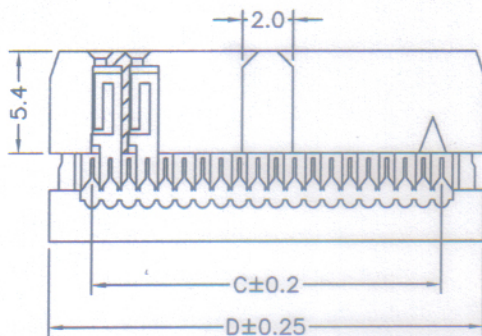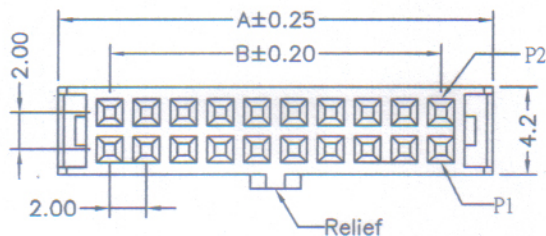

P/N: SR2000-XXB

S.R.

Strain Relief

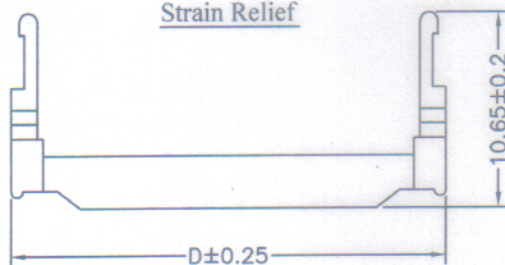

CIRCUITS	DIMENSION				CIRCUITS	DIMENSION				CIRCUITS	DIMENSION			
	A	B	C	D		A	B	C	D		A	B	C	D
6	11.34	4.00	5.00	11.14	20	25.34	18.00	19.00	25.14	36	41.34	34.00	35.00	41.14
8	13.34	6.00	7.00	13.14	22	27.34	20.00	21.00	27.14	40	45.34	38.00	39.00	45.14
10	15.34	8.00	9.00	15.14	24	29.34	22.00	23.00	29.14	44	49.34	42.00	43.00	49.14
12	17.34	10.00	11.00	17.14	26	31.34	24.00	25.00	31.14	50	55.34	48.00	49.00	55.14
14	19.34	12.00	13.00	19.14	28	33.34	26.00	27.00	33.14	60	65.34	58.00	59.00	65.14
16	21.34	14.00	15.00	21.14	30	35.34	28.00	29.00	35.14	64	69.34	62.00	63.00	69.14
18	23.34	16.00	17.00	23.14	34	39.34	32.00	33.00	39.14					