

.100"(2.54mm) pitch single row female Headers




CM328 Series

- * Poles: 2-40
- * Material: Insulator: P.B.T. UL94V-0 Black
- * Contact material: Brass Gold flash

Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -40°C~+105°C
- * Insulation resistance: 2,000MΩ min.




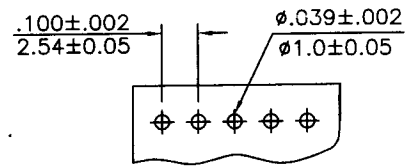


P.C. Board Layout

P/N: CM328S-XXGF

inches
mm

P/N: CM328R-XXGF

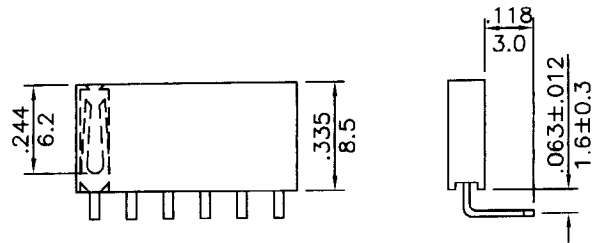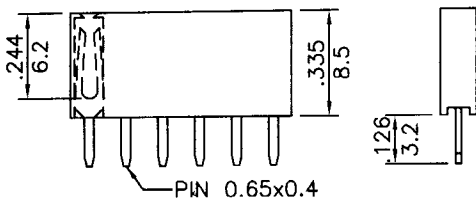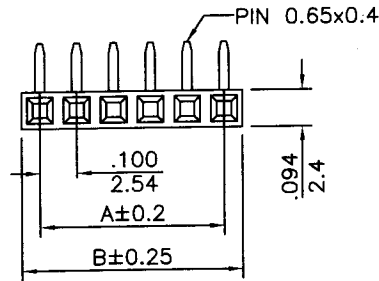

CIRCUITS	PART NO.	DIMENSION in.(mm)		CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B			A	B
2	CM328X-02	0.100(2.54)	0.220(5.6)	22	CM328X-22	2.100(53.34)	2.220(56.4)
3	CM328X-03	0.200(5.08)	0.319(8.1)	23	CM328X-23	2.200(55.88)	2.323(59.0)
4	CM328X-04	0.300(7.62)	0.421(10.7)	24	CM328X-24	2.300(58.42)	2.421(61.5)
5	CM328X-05	0.400(10.16)	0.524(13.3)	25	CM328X-25	2.400(60.96)	2.520(64.0)
6	CM328X-06	0.500(12.70)	0.622(15.8)	26	CM328X-26	2.500(63.50)	2.622(66.6)
7	CM328X-07	0.600(15.24)	0.720(18.3)	27	CM328X-27	2.600(66.04)	2.724(69.2)
8	CM328X-08	0.700(17.78)	0.823(20.9)	28	CM328X-28	2.700(68.58)	2.823(71.7)
9	CM328X-09	0.800(20.32)	0.921(23.4)	29	CM328X-29	2.800(71.12)	2.921(74.2)
10	CM328X-10	0.900(22.86)	1.024(26.0)	30	CM328X-30	2.900(73.66)	3.024(76.8)
11	CM328X-11	1.000(25.40)	1.122(28.5)	31	CM328X-31	3.000(76.20)	3.122(79.3)
12	CM328X-12	1.100(27.94)	1.220(31.0)	32	CM328X-32	3.100(78.74)	3.220(81.8)
13	CM328X-13	1.200(30.48)	1.323(33.6)	33	CM328X-33	3.200(81.28)	3.323(84.4)
14	CM328X-14	1.300(33.02)	1.421(36.1)	34	CM328X-34	3.300(83.82)	3.421(86.9)
15	CM328X-15	1.400(35.56)	1.527(38.7)	35	CM328X-35	3.400(86.36)	3.524(89.5)
16	CM328X-16	1.500(38.10)	1.622(41.2)	36	CM328X-36	3.500(88.90)	3.622(92.0)
17	CM328X-17	1.600(40.64)	1.720(43.7)	37	CM328X-37	3.600(91.44)	3.720(94.5)
18	CM328X-18	1.700(43.18)	1.823(46.3)	38	CM328X-38	3.700(93.98)	3.823(97.1)
19	CM328X-19	1.800(45.72)	1.819(48.8)	39	CM328X-39	3.800(96.52)	3.921(99.6)
20	CM328X-20	1.900(48.26)	2.024(51.4)	40	CM328X-40	3.900(99.06)	4.024(102.2)
21	CM328X-21	2.000(50.80)	2.122(53.9)				