






2.00mm Pitch Dual Row SMT Pin Header



CW202ST Series

Specifications

- * Circuits: 4-80
- * Material: Insulator: NYLON 6T UL 94V-0 BLACK
- * Contact: 0.50mm (.020") square pin, brass, gold flash Over Nickel Plated
- * Mates with CH202 CH204 CH2006 series
- * Current rating: 1A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -40°C ~ +105°C
- * Insulation resistance: 5,000MΩ min.
- * Withstand voltage: 1000V AC/minute

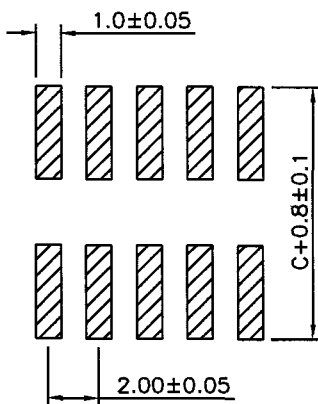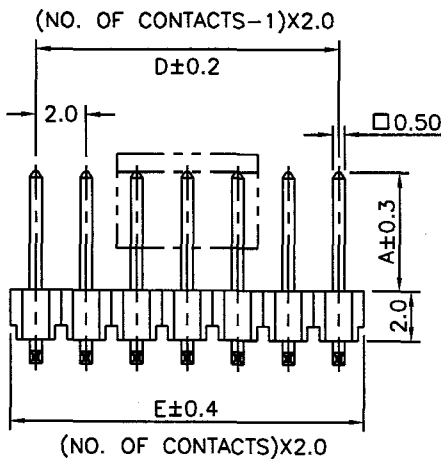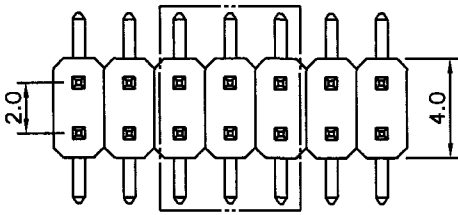

P.C.B LAYOUT

SPECIAL DIM NEED MOQ REQUIREMENT.

CW202ST SERIES	DIMENSION mm		
	A	B	C
STANDARD TYPE	3.7	3.85	10.0
SPECIAL DIM.			

ORDERING CODE

CW202ST - 2x10 G AXXBXXCXX P
 1 2 3 4 5

1. SERIES NO.
2. NO.OF CIRCUIT 04~80
3. CONTACT PLATING
G=GOLD FLASH OVER NICKEL PLATED
*OPTIONAL PLATING AVAILABLE BUT MOQ REQUESTED
4. A/B/C PIN SIZE
5. PACKAGING OPTION:
P=WITHOUT PICK&PLACE PAD(PE&BAG)
R=WITH PICK&PLACE PAD(TAPE&REEL)