

# .079"(2.00mm) pitch single row headers




## CW203 Series

- \* Poles:2-20
- \* Material:Insulator:NYLON UL94V-2
- \* Contact:0.50mm(.020") square pin,brass,tin plated
- \* Mates with CH203 series housing

## Specifications

- \* Current rating: 2A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range: -25°C~+85°C
- \* Insulation resistance: 1,000MΩ min.
- \* Withstand voltage: 800V AC/minute
- \* Applicable PC board thickness: .063" (1.6mm)






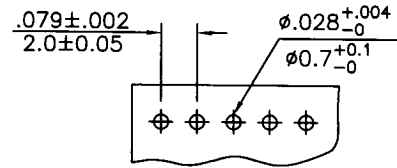


P.C. Board Layout

P/N: CW203S-XX

P/N: CW203R-XX

inches  
mm

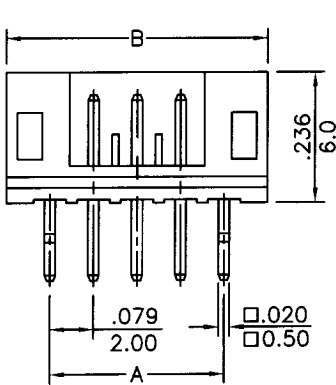

CIRCUITS	PART NO.	DIMENSION in.(mm)		CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B			A	B
2	CW203X-02	0.079(2.00)	0.236(6.0)	12	CW203X-12	0.866(22.00)	1.024(26.0)
3	CW203X-03	0.157(4.00)	0.315(8.0)	13	CW203X-13	0.945(24.00)	1.102(28.0)
4	CW203X-04	0.236(6.00)	0.394(10.0)	14	CW203X-14	1.024(26.00)	1.181(30.0)
5	CW203X-05	0.315(8.00)	0.472(12.0)	15	CW203X-15	1.102(28.00)	1.260(32.0)
6	CW203X-06	0.394(10.00)	0.551(14.0)	16	CW203X-16	1.181(30.00)	1.339(34.0)
7	CW203X-07	0.472(12.00)	0.630(16.0)	17	CW203X-17	1.260(32.00)	1.418(36.0)
8	CW203X-08	0.551(14.00)	0.709(18.0)	18	CW203X-18	1.339(34.00)	1.496(38.0)
9	CW203X-09	0.630(16.00)	0.787(20.0)	19	CW203X-19	1.418(36.00)	1.575(40.0)
10	CW203X-10	0.709(18.00)	0.866(22.0)	20	CW203X-20	1.496(38.00)	1.654(42.0)
11	CW203X-11	0.787(20.00)	0.945(24.0)				