
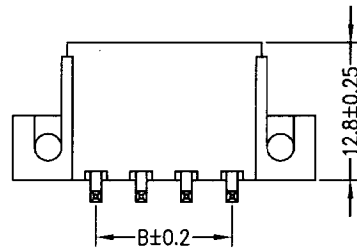



Features and Information

Available in 2-6 Circuit Header
 Header: Nylon66 UL94V-2 or 94V-0
 Header pin: Brass Tin-plated
 Temperature: -40°C TO +105°C
 Voltage Rating: 500V
 Current Rating: 8 Amps Max
 Contact Resistance: 10 milli ohms Max
 Insulation Resistance: 1000 Megohms Min
 Dielectric With standing Voltage: 1500V AC
 Mates with CH4257-XX Series Housing
Mechanical and Physical
 Contact Insertion Force: 1.5Kg max
 Contact Retention to Header: 3.0Kg min
 Insertion Force to PCB: 5.0kg max

P/N: CW4269RA-XXA2T

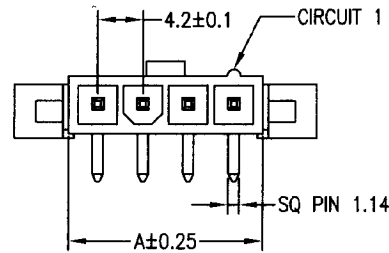


CIRCUITS	DIMENSION	
	A	B
2	9.6	4.20
3	13.8	8.40
4	18.0	12.60
5	22.2	16.80
6	26.4	21.00

ORDER INFORMATION

CW4269RA - XX A2 T
 1 2 3 4

- Series No.
CW4269RA=Screw Hole
- Contact No. Of.
(02~06)
- Insulator Material:
A2=NYLON66 UL 94V-2 Natural
- Terminal Plating
T=Tin Plated

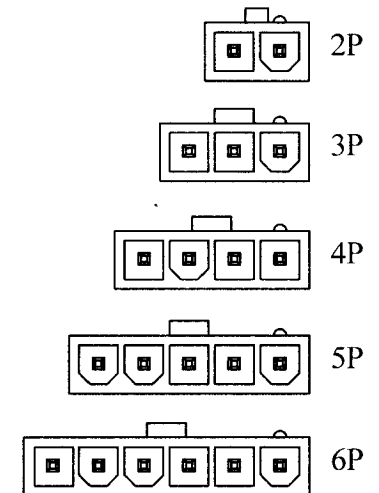

詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	4.2mm(.165") Pitch Vertical Header	GENERAL TOLERANCE	DRAWN	許建華	DATE	2006.04.09		
	PART NO.	CW4269RA-XXA2T	DIM: X. ±0.5 X.X ±0.25 X.XX ±0.2 X.XXX ±0.08	CHECK		DATE			
	DWG.NO.	CW4269RA-XXA2T		APPROVE		DATE			
				SCALE	3:2	UNIT	mm	REV.	01