





Features and Information

Available in 2-6 Circuit Header
 Header:Nylon66 UL94V-2
 Header pin:Brass Tin-plated
 Temperature:-40°C TO +105°C
 Voltage Rating:500V
 Current Rating:8 Amps Max
 Contact Resistance:10 milli ohms Max
 Insulation Resistance:1000 Megohms Min
 Dielectric With standing Voltage:1500V AC
 Mates with CH4257-XX Series Housing
 Mechanical and Physical
 Contact Insertion Force:1.5Kg max
 Contact Retention to Header:3.0Kg min
 Insertion Force to PCB:5.0kg max



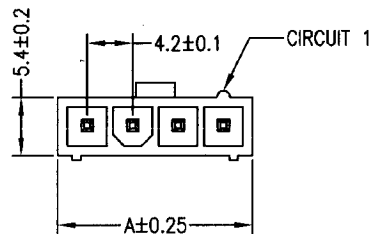


ORDER INFORMATION

CW4269RS - XX A2 T
 1 2 3 4

- 1.Series No.
- 2.Contact No. Of.
(02~06)
- 3.Insulator Material:
A2=NYLON66 UL 94V-2 Natural
- 4.Terminal Plating
T=Tin Plated

CIRCUITS	DIMENSION	
	A	B
2	9.6	4.20
3	13.8	8.40
4	18.0	12.60
5	22.2	16.80
6	26.4	21.00



詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	4.2mm(.165") Pitch Vertical Header	GENERAL TOLERANCE	DRAWN	許建華	DATE	2006.04.09		
	PART NO.	CW4269RS-XXA2T	DIM: X. ±0.5 X.X ±0.25 X.XX ±0.2 X.XXX ±0.08	CHECK		DATE			
	DWG.NO.	CW4269RS-XXA2T		APPROVE		DATE			
				SCALE	3:2	UNIT	mm	REV.	01