

.098"(2.50mm) pitch Wire to Wire Connectors





H6504 Series

- * Poles:2-12
- * Material:NYLON 66 UL 94V-2
- * Suitable T6504T series terminal
- * Mates with H6503 series

Specifications

- * Current rating: 3A AC,DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 500MΩ min.
- * Withstand voltage: 1,000V AC/minute

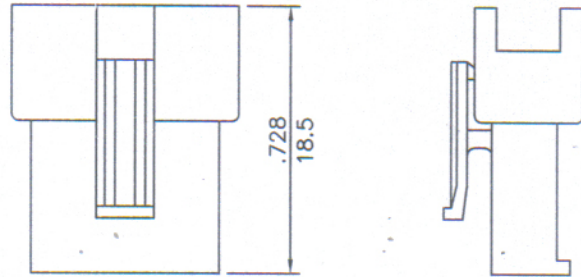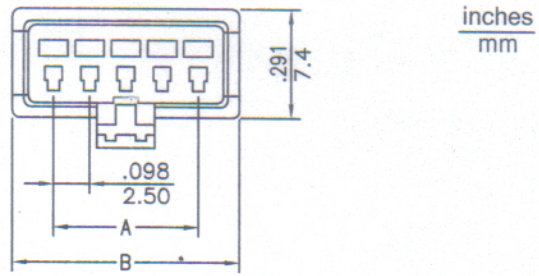

CIRCUITS	PART NO.	DIMENSION in.(mm)		CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B			A	B
2	H6504-02	0.098(2.50)	0.319(8.1)	8	H6504-08	0.689(17.50)	0.913(23.2)
3	H6504-03	0.197(5.00)	0.421(10.7)	9	H6504-09	0.787(20.00)	1.012(25.7)
4	H6504-04	0.295(7.50)	0.520(13.2)	10	H6504-10	0.886(22.50)	1.110(28.2)
5	H6504-05	0.394(10.00)	0.618(15.7)	11	H6504-11	0.984(25.00)	1.209(30.7)
6	H6504-06	0.492(12.50)	0.717(18.2)	12	H6504-12	1.083(27.50)	1.307(33.2)
7	H6504-07	0.591(15.00)	0.815(20.7)				

.098"(2.50mm) pitch male crimp terminal

T6504T Series

- * Material: Brass
- * Finished: Tin-plated
- * Used in H6504 series housings
- * Wire range: AWG#22~#28
- * Insulation O.D: 1.2~1.8mm
- * Thickness: 0.25mm
- * Q'TY: 7,000pcs/reel

inches
mm

