


SERIES ^{66A2}_{66A3E} .084" (Ø2.10m/m) Wire-to-wire Connectors

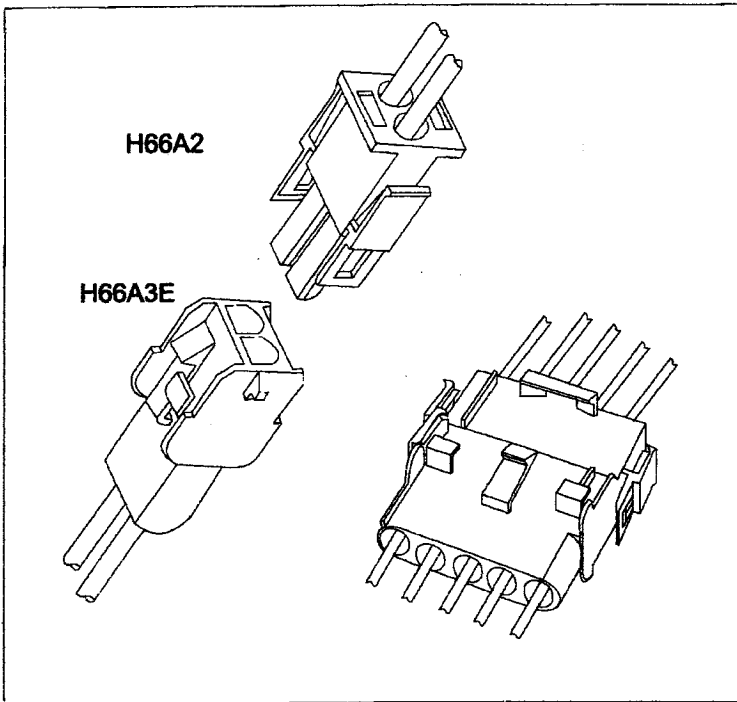


SPECIFICATIONS

- ⊛ Circuit: 1, 2, 3, 4, 5, 6, 9, 12, 15
- ⊛ Voltage rating: 300V AC, DC
- ⊛ Current rating: 12A AC, DC
- ⊛ Withstanding voltage: 1500V AC/minute
- ⊛ Insulation resistance: 1000MΩ min
- ⊛ Temperature range: -25°C ~ +90°C
- ⊛ Unit(單位): m/m
- ⊛ Material(材質): UL94V-2 nylon 66
- ⊛ Tolerance(公差) ±0.3 m/m

Part NO	WIRE RANGE AWG	O. D. OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL	Part NO	WIRE RANGE AWG	O. D. OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
T66A3A	20-16	1.9-3.4	BRASS	TIN-Plated	4000	T66A2A	20-16	1.9-3.4	BRASS	TIN-Plated	4000
T66A3AL	20-16	1.9-3.4	BRASS	TIN-Plated	4000 (6P~15P)						

PART NO : T66A3A / T66A3AL

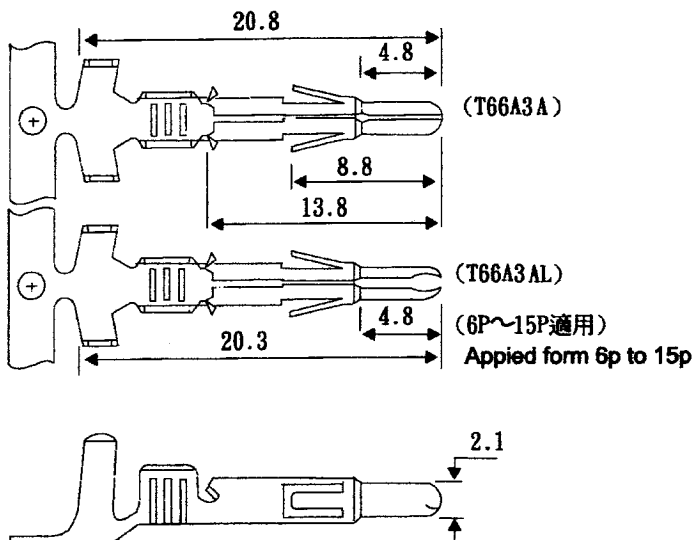

PART NO : T66A2A

