


.049"(1.25mm) pitch single row Headers DIP TYPE



- * Poles: 2~15
 - * Material: Insulator: HTN6T UL94V-0 Natural
 - * Pin: Brass Tin-Plated
 - * Mates with CH1251-XX series housing
- Specifications**
- * Current rating: 1A AC, DC
 - * Voltage rating: 125V AC, DC
 - * Temperature range: -25°C~+85°C
 - * Insulation resistance: 100MΩ min.
 - * Dielectric Withstand voltage: 250V AC/minute






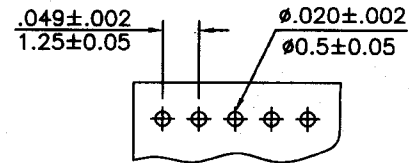


P.C. Board Layout

inches
mm

P/N:HW1252SP-XXT Straight Angle

P/N:HW1252RP-XXT Right Angle

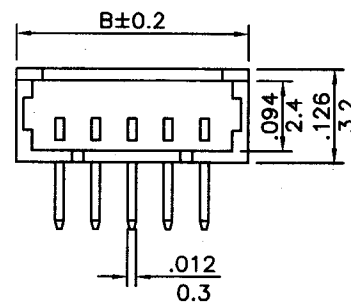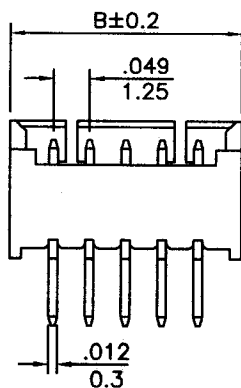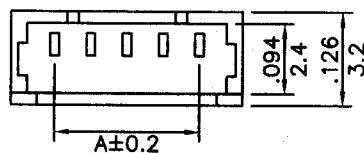

CKTS	PART NO.	DIMENSION in.(mm)		CKTS	PART NO.	DIMENSION in.(mm)	
		A	B			A	B
2	HW1252XP-02T	0.049(1.25)	0.167(4.25)	9	HW1252XP-09T	0.394(10.00)	0.512(13.00)
3	HW1252XP-03T	0.098(2.50)	0.217(5.50)	10	HW1252XP-10T	0.443(11.25)	0.561(14.25)
4	HW1252XP-04T	0.148(3.75)	0.266(6.75)	11	HW1252XP-11T	0.492(12.50)	0.610(15.50)
5	HW1252XP-05T	0.197(5.00)	0.315(8.00)	12	HW1252XP-12T	0.541(13.75)	0.659(16.75)
6	HW1252XP-06T	0.246(6.25)	0.364(9.25)	13	HW1252XP-13T	0.591(15.00)	0.709(18.00)
7	HW1252XP-07T	0.295(7.50)	0.413(10.50)	14	HW1252XP-14T	0.640(16.25)	0.758(19.25)
8	HW1252XP-08T	0.344(8.75)	0.463(11.75)	15	HW1252XP-15T	0.689(17.50)	0.807(20.50)