
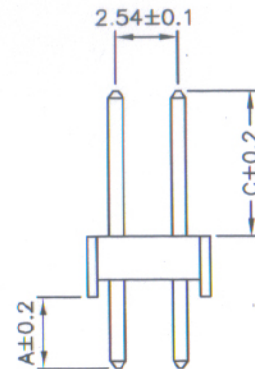


P.C. Board Layout

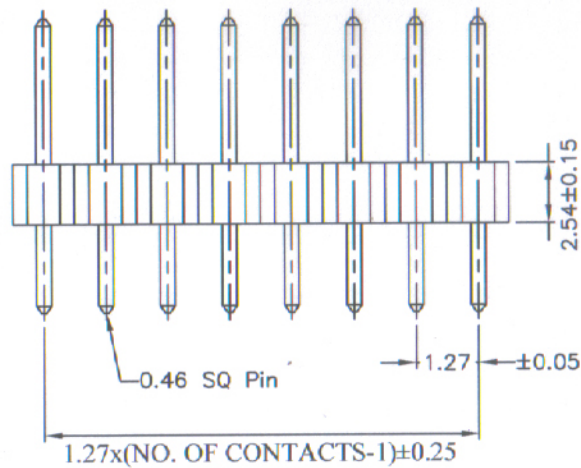

SPECIFICATIONS

- * Current rating: 1Amp
- * Insulation resistance: 1,000MΩ min.
- * Contact Resistance: 20mΩ max
- * Dielectric Withstanding: AC 300V
- * Temperature range: -40°C~+105°C
- * Contact: 0.46mm (.018") square pin, Brass
- * Material: Insulator: Polyester, UL 94V-0
Standard: Nylon-6T
- * Contact Plated: See Option/Standard: Full Gold

Order Information

P1278 S - 2 x XX GA XX

- Serial No. ————
- Terminal Type ————
S: Straight Angle Type
- Row Type ————
2: Dual Rows
- No. of Contact Per Row ————
- Contact Plated ————
GA=Gold Flash
TA=Tin 100u"
- Terminal Dim. ————
01: A=3.0 , C=4.0
02: A=..... , C=.....
03: A=..... , C=.....

詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	Pin Header P1.27x2.54mm H: 2.54mm Dual Rows, Straight Angle Dip Type	TOLERANCE	DRAWN	許建華	DATE	2010.06.20		
	PART NO.	P1278S-2xXXGAXX	DIM.	CHECK		DATE			
	DWG.NO.	P1278S-2xXXGAXX	.0 ±0.30	APPROVE		DATE			
			.00 ±0.20	SCALE	4:1	UNIT	mm	REV.	01
			.000 ±0.10						