



P.C.B LAYOUT



Specifications

- \* Poles: 1x2~1x40
- \* Material: Insulator: Polyester, UL 94V-0  
Standard: Nylon6T Black
- \* Contact: 0.64mm(.025") square pin, brass,
- \* Current rating: 3Amps
- \* Temperature range: -40°C~+105°C
- \* Contact resistance: 20mΩ max.
- \* Insulation resistance: 1,000MΩ min.
- \* Dielectric Withstanding : AC 600V RMS
- \* Contact Plated: See Option / Standard: Full Gold

Order Information

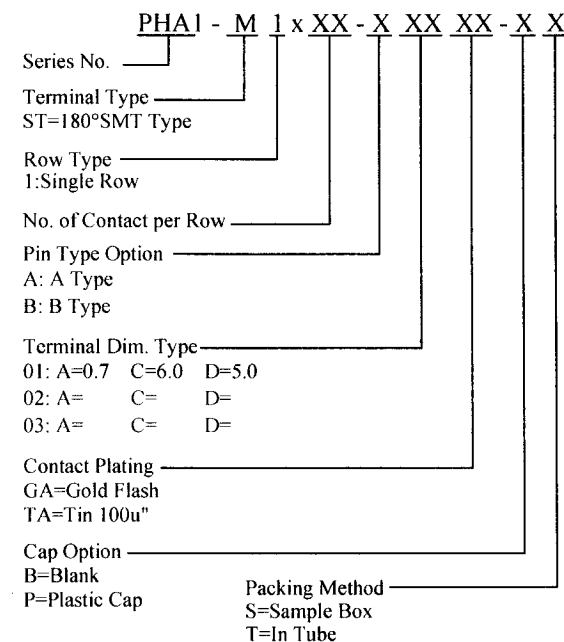

詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	Pin Header Pitch 2.54mm Single Row SMT180° Type	GENERAL TOLERANCE	DRAWN	許建華	DATE	2005.07.10		
	PART NO.	PHA1-M1xXX-XXXXX-XX	DIM: X.     ±0.5 X.X   ±0.25 X.XX  ±0.2 X.XXX ±0.08	CHECK		DATE			
	DWG. NO.	PHA1-M1xXX-XXXXX-XX		APPROVE		DATE			
				SCALE	3:1	UNIT	mm	REV.	01