




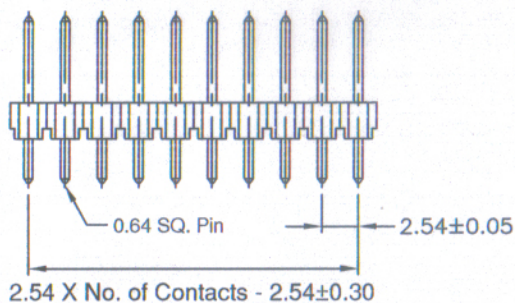


Recommended
P.C. Board Hole Layout



Specifications

- * Current Rating: 3 Amps
- * Insulator Resistance: 1,000M Ω min.
- * Contact Resistance: 20 Ω max.
- * Dielectric Withstanding : AC 600V
- * Operating Temperature : -40°C~+105°C
- * Contact Material :Brass
- * Insulator Material: Polyester, UL 94V-0 P.B.T.
- * Contact Plated: See Option
Standard: Full Gold Flash

Order Information

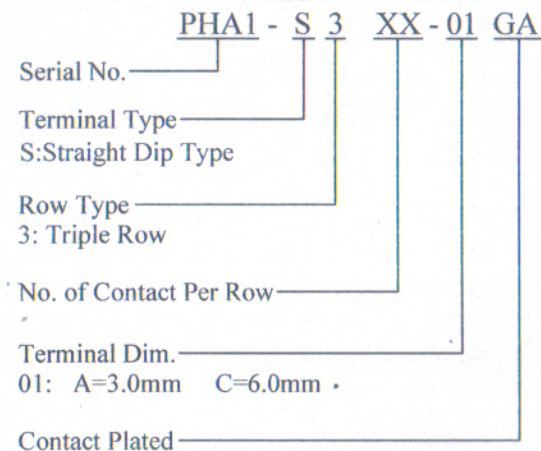

Contact Plating Option	Full Gold Plating	Full Tin Plating
	GA: Gold Flash	TA: Tin 100u"

詮盛企業股份有限公司
CHIEN SHERN ENTERPRISE CO.,LTD.

TITLE	Pin Header P:2.54X2.54mm H2.54mm, Triple Rows Striaight Dip Type
PART NO.	PHA1-S3XX-01GA
DWVG.NO.	PHA1-S3XX-01GA

TOLERANCE	DRAWN	許建華	DATE	2009.03.05		
DIM. .0 ±0.30 .00 ±0.20 .000 ±0.10	CHECK		DATE			
	APPROVE		DATE			
	SCALE	2:1	UNIT	mm	REV.	01