

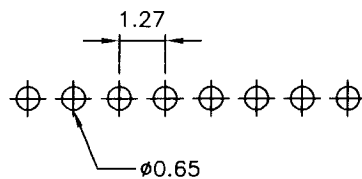
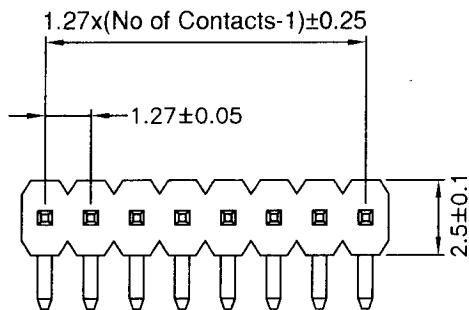


ROHS



P.C.B. Layout

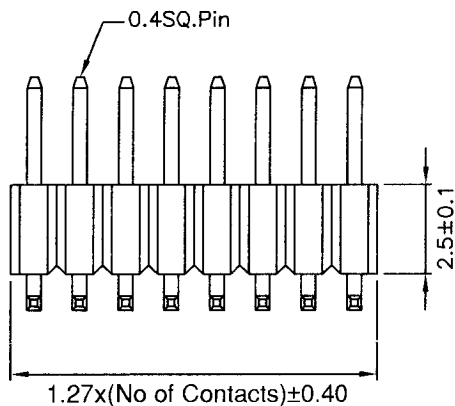

SPECIFICATIONS

- \* Current rating: 1Amp
- \* Operating Temperature: -40°C~+105°C
- \* Insulator resistance: 1,000MΩ min.
- \* Contact resistance: 20mΩ max.
- \* Dielectric Withstanding: 300V AC
- \* Insulator Material: Polyester UL94V-0 Nylon-6T
- \* Contact Material: 0.40mm(.016") square pin Brass
- \* Contact Plated: Full Gold Flash

ORDERING CODE

PHC5 - R 1 x XX - 01 GA

Serial No. \_\_\_\_\_  
 Terminal Type \_\_\_\_\_  
 R: Right Angle  
 Row Type \_\_\_\_\_  
 1: Single Row  
 No. of Contact Per Row \_\_\_\_\_  
 Terminal Dim \_\_\_\_\_  
 01: A=2.3 B=1.0 C=3.0(Standard)  
 Contact Plated \_\_\_\_\_  
 GA=Gold Flash

詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	Pitch 1.27mm Pin Header Right Angle H:1.0mm	TOLERANCE	DRAWN	許建華	DATE	2011.05.25		
	PART NO.	PHC5-R1xXX-01GA	DIM.	CHECK		DATE			
	DWG.NO.	PHC5-R1xXX-01GA	.0 ±0.30	APPROVE		DATE			
			.00 ±0.20	SCALE	5:1	UNIT	mm	REV.	01
			.000 ±0.10						