

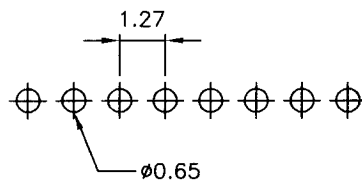
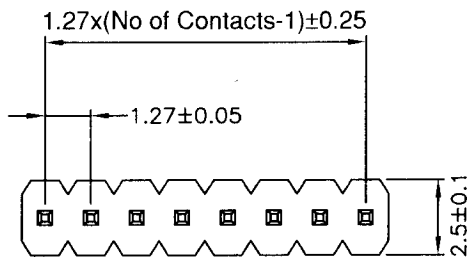


ROHS



P.C.B. Layout

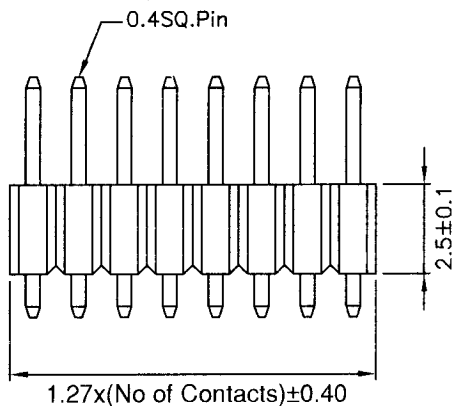

SPECIFICATIONS

- * Current rating: 1Amp
- * Operating Temperature: -40°C~+105°C
- * Insulator resistance: 1,000MΩ min.
- * Contact resistance: 20mΩ max.
- * Dielectric Withstanding: 300V AC
- * Insulator Material: Polyester UL94V-0 Nylon-6T
- * Contact Material: 0.40mm(.016") square pin Brass
- * Contact Plated: Full Gold Flash

ORDERING CODE

PHC5 - S 1 x XX - 01 GA

Serial No. _____

Terminal Type _____
S: Straight Angle

Row Type _____
1: Single Row

No. of Contact Per Row _____

Terminal Dim _____
01: A=2.3 C=3.0(Standard)

Contact Plated _____
GA=Gold Flash

<p>詮盛企業股份有限公司</p> <p>CHIEN SHERN ENTERPRISE CO.,LTD.</p>	TITLE	Pitch 1.27mm Pin Header Straight Angle H:1.0mm	TOLERANCE	DRAWN	許建華	DATE	2011.05.25		
	PART NO.	PHC5-S1xXX-01GA	DIM.	CHECK		DATE			
	DWG.NO.	PHC5-S1xXX-01GA	.0 ±0.30	APPROVE		DATE			
			.00 ±0.20	SCALE	5:1	UNIT	mm	REV.	01
			.000 ±0.10						