

.118"(3.00mm) pitch SMD Headers Connector



W3045 SMD Series

- * Poles: 2-24
- * Material: Insulator: High Temp LCP UL94V-0 BLACK
- * Contact: Brass Tin plated
- * Mates with CH3025 series Housing

Specifications

- * Current rating: 5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -40°C~+105°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 1500V AC/minute

inches
mm

ORDERING CODE


W3045XT-2x12 N T R
1 2 3 4 5

- SERIES NO. SMT TYPE
- NO. OF CIRCUIT 2x1~2x12
- OTHER OPTIONS
N=SURFACE MOUNT WITH NAIL
C2=WITH CLIP 2.0, C3=WITH CLIP 3.2
- CONTACT PLATED
T=TIN OVER NICKEL
- PACKAGING
R=TAP&REEL

P/N: W3045ST-2xXXNTR


SMD WITH FITTING NAIL

(NO. OF CONTACTS-1)x3.0




P/N: W3045RT-2xXXNTR


SMD WITH FITTING NAIL




(NO. OF CONTACTS)x3.0+3.7

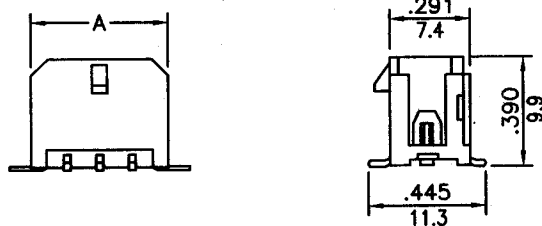

(NO. OF CONTACTS)x3.0+3.7

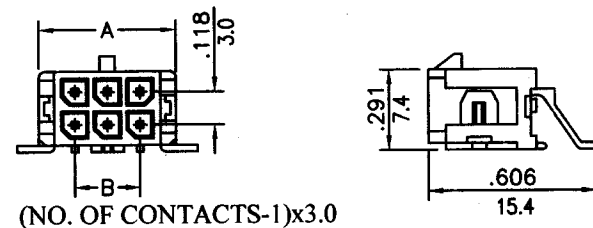

P.C.B LAYOUT

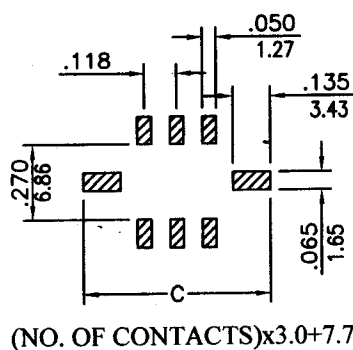

P.C.B LAYOUT

