



P.C. Board Layout

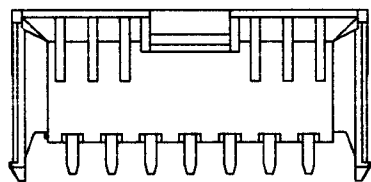

VERTICAL HEADER
W/MTG PEGS

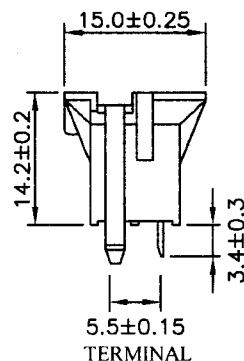

5.5±0.15
TERMINAL

MATERIAL:

Housing: Nylon 66, UL 94V-0 Color: White.
Contacts: Brass tin-plated

FEATURES:

Available in 4 thru 24 circuits
Voltage rating: 500V/AC (R.M.S.)
Current rating: 8 Amps Max.
Mates with CH4204-XX series Housing
And CM4203SA-XX series header

ELECTRICAL:

Withstanding Voltage: 1500V AC for 60 seconds.
Insulation Resistance: 1000 Megohms Min.
Contact Resistance: 10 Milliohms Max.
Storage Temperature Range: -40°C to 105°C
Temperature Rise: 30°C Max.

ORDERING CODE

W4240D - XX W0 T
1 2 3 4

- 1.SERIES NO.
- 2.CIRCUIT SIZE:
04~24
- 3.HOUSING MATERIAL:
W0=NYLON 66, UL 94V-0
Color: WHITE
- 4.TERMINAL PLATING:
T=Tin plated

CKTS	DIM. "A"	DIM. "B"	CKTS	DIM. "A"	DIM. "B"
4	4.20	15.2	16	29.40	40.6
6	8.40	19.4	18	33.60	44.8
8	12.60	23.6	20	37.80	49.0
10	16.80	27.8	22	42.00	53.2
12	21.00	32.0	24	46.20	57.4
14	25.20	36.4			

TOLERANCE

02P~08P=A±0.2, B±0.3
10P~16P=A±0.3, B±0.4
18P~24P=A±0.4, B±0.5

詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	4.20mm(.165")PITCH BMI TYPE PLUG CONNECTOR	TOLERANCE	DRAWN		DATE	2008.12.23
	PART NO.	W4240D-XXW0T	DIM.	CHECK		DATE	
	DWG.NO.	W4240D-XXW0T	0.0 ±0.25	APPROVE		DATE	
			0.00 ±0.20	SCALE		UNIT	mm
			0.000 ±0.08				