

# 110 Series FASTON Receptacles

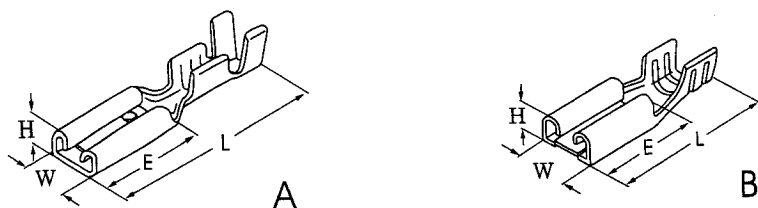


FIG	PART NO.	TREATMENT	WIRE RANGE		Dimension(mm)				THICKNESS (mm)	QTY	REMARKS
			mm <sup>2</sup>	AWG#	H	W	L	E			
A	804001-41BS	0 2	0.5~1.3	20~16	1.9	3.7	15.5	6.3	0.25	12,000	TAB=0.5 110-5高
A	804001-21BS	0 2	0.3~0.5	22~20	1.85	3.7	15.5	6.3	0.25	15,000	TAB=0.5 110-5中
A	804002-21BS	0 2	0.13~0.3	26~22	1.85	3.7	15.5	6.3	0.25	15,000	110-5 凸點中
A	804001-01BS	0 2	0.13~0.3	26~22	1.85	3.7	15.5	6.3	0.25	15,000	TAB=0.5 110-5低
A	804005BS	0 2	0.5~1.3	20~16	2.0	3.7	15.5	6.3	0.25	12,000	TAB=0.8 110-8高
A	804006BS	0 2	0.3~0.5	22~20	2.0	3.7	15.5	6.3	0.25	15,000	TAB=0.8 110-8中
A	804007BS	0 2	0.13~0.3	26~22	2.0	3.7	15.5	6.3	0.25	15,000	TAB=0.8 110-8低
A	804006-1BS	0 2	0.3~0.5	22~20	1.9	3.7	15.5	6.3	0.25	15,000	TAB=0.6 110-6中
A	804011BS	0 2	0.5~2.0	20~14	1.8	3.7	15.5	6.3	0.25	15,000	TAB=0.3 110-3中
A	804015BS	0 2	0.13~0.3	26~22	1.8	3.7	15.5	6.3	0.25	15,000	TAB=0.15 110-0.15低
A	804016BS	0 2	0.13~0.3	26~22	1.8	3.7	15.5	6.3	0.25	15,000	TAB=0.3 110-3低
B	804030BS	0 2	0.3~0.8	22~18	1.85	3.7	11.5	6.0	0.25	20,000	TAB=0.5 110-5單
B	804031BS	0 2	0.3~0.8	22~18	2.0	3.7	11.5	6.0	0.25	20,000	TAB=0.8 110-8單
B	804032BS	0 2	0.3~0.8	22~18	1.8	3.7	11.5	6.0	0.25	20,000	TAB=0.3 110-3單

## ORDER INFORMATION

8040XX-XX  $\frac{B}{2}$   $\frac{S}{3}$   $\frac{0}{4}$

1. SERIES
2. MATERIAL : B=BRASS
3. PACKAGE :  
S=SERIAL
4. SURFACE TREATMENT :  
0=NONE  
2=TIN PLATING